

# CAR and DRIVER

FEBRUARY 1967 • 60 CENTS

## Super Mustang!

Shelby 428 cu. in. GT 500

Road Tests: **BMW 1600** *The World's Best \$2500 Automobile*

**Pontiac Le Mans Sprint**

Salon: **MG's Immortal TC**

Racing: **Riverside • Laguna Seca**

**Las Vegas • Mexican GP**




C/D TAKES A RIDE IN A CHAPARRAL



CAR and DRIVER ROAD TEST

# SHELBY GT500

Carroll Shelby's Mustangs have come a long way since bib overalls. But then, so have we.

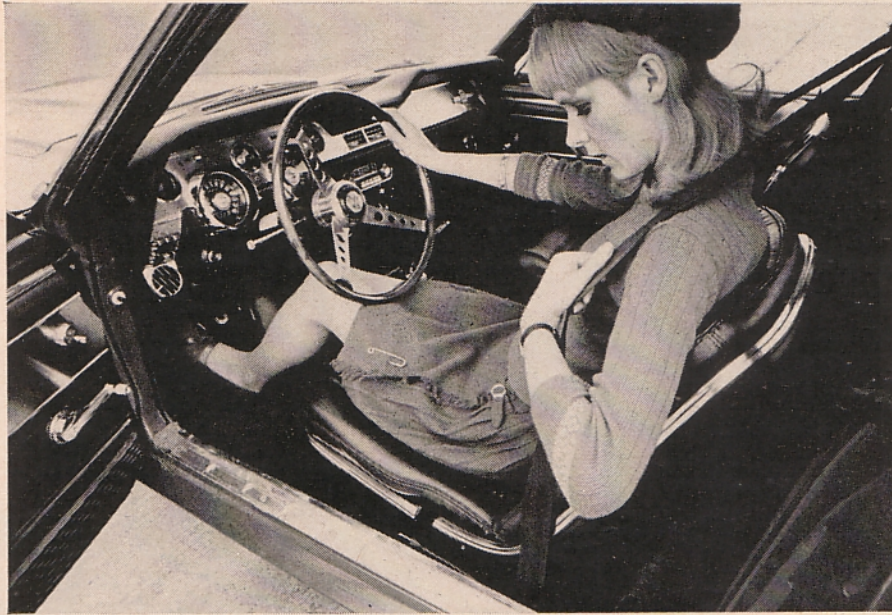

Seven liters! Four hundred and twenty-eight cubic inches in a *Mustang!* We were expecting a cataclysm on wheels, the automotive equivalent of the end of the earth. We were pleasantly surprised to discover that the GT 500 isn't anything like that.

The old corollary to that old adage, "There's no substitute for cubic inches," is "except rectangular money"—and who would know better than Carroll Shelby. When the Cobra 289 peaked out on the race track, there were several ways of making it go faster—most expensive, one cheap. One of the more expensive ways was the Daytona coupe body. The late Ken Miles found a better way. At Sebring in 1964, he shoehorned a Ford 427 NASCARized engine into a Cobra roadster. The experiment came to rest, sorely bent, against a palm tree, but Miles persisted. By the end of the season, at Nassau, he had another one bolted together. It blew up, but the die was cast. Early in 1965, Shelby an-

nounced the Cobra II with a 427 cu. in. V-8 replacing the 289. That June, at Le Mans, two of Ford's rear-engined GT prototypes appeared with the big 427 instead of the 289. The Europeans hooted and jeered at the bulky, heavy, unsophisticated V-8 with its pushrods and single four-barrel carburetor. A year later, Ford 427s swept the first three places at the French classic, with Shelby's two entries dead-heating the final lap. What the 427s had beaten was a team of 270 cu. in. Ferrari V-12s with multiple carburetion and four overhead camshafts. The Italian engine developed almost as much horsepower as the Ford—425 hp vs. 485—but it was much more tautly stressed and, therefore, fragile. Which is the whole point of 7-liter Fords, Cobras, and now, Shelby Mustangs.

For '67, Ford offered the Mustang with their tried-and-true 390 V-8, which has a bore and stroke of 4.05 x 3.78 inches. Ford also builds a 428 V-8 on the same block with a bore

and stroke of 4.13 x 3.98 inches. Why not, reasoned Shelby, use this engine in the '67 Shelby Mustang? Why not indeed. The car is called the GT 500 and its engine is called the Cobra Le Mans.

Somebody is telling a little white half-truth.

Please note that the Cobra Le Mans engine displaces 428 cubic inches. That sounds like a hair better than the 427. In fact, they are two entirely different engines. Both have the same external dimensions, but the 427 is more oversquare, with a bore and stroke of 4.23 x 3.78. The 427 is a racing engine, full of the kind of intestinal fortitude that makes it capable of enduring 500 miles at Daytona and 24 hours at Le Mans. The 428 is a passenger-car engine, and nearly \$1000 cheaper than the 427. Few people would be happy with the 427 unless they were racing it. It's noisy, balky, and an oil-burner at normal highway speeds.

The GT 500 is not a racing car, although but for a few subtle differences its engine is the same as the one that propelled Shelby's Fords to victory at Le Mans. Seven liters in a Mustang! The early GT 500 engineering prototype was the fastest car ever to lap Ford's twisty handling loop, except for the GT 40s, of course. And the same car cut a quarter-mile in 13.6 seconds at 106 mph. Super car!


So we braced ourselves when we stuck our editorial foot into the first production GT 500. And when it only turned 15.0 at 95, we were a bit disappointed. That's only 2/10ths of a second quicker than the Mustang 390 automatic (C/D, November '65) and last year's GT 350H automatic (C/D, May '66), and not quite as fast as the original GT 350 4-speed (C/D, May '65). But then we thought back on the earlier GT 350s and realized that what the old Shelby Mustang does with difficulty, the GT 500 does easily.

The GT 500 is an adult sports car. Shelby's Mustangs have come a long way in three years—from adolescence to maturity. The '65 GT 350 was a hot-rodder's idea of a sports car—a rough-riding bronco that was as exciting to drive as a Maserati 300S, and about as marketable a proposition. The traction bars clanked, the side exhausts were deafening, the clutch was better than an advanced Charles Atlas program, and when the ratcheting-type limited-slip differential unlocked, it sounded like the rear axle had cracked in half. It rode like a Conestoga wagon and steered like a 1936 Reo chain-drive, solid-tire coal



PHOTOGRAPHY: PETE BIRO

Hairy air scoops are a Shelby trademark, as on the GT 40 (left). The GT 500's upper scoop exhausts interior air, while the lower one cools the brakes. The 428 engine isn't the Le Mans winner, but it does the job in the GT 500.

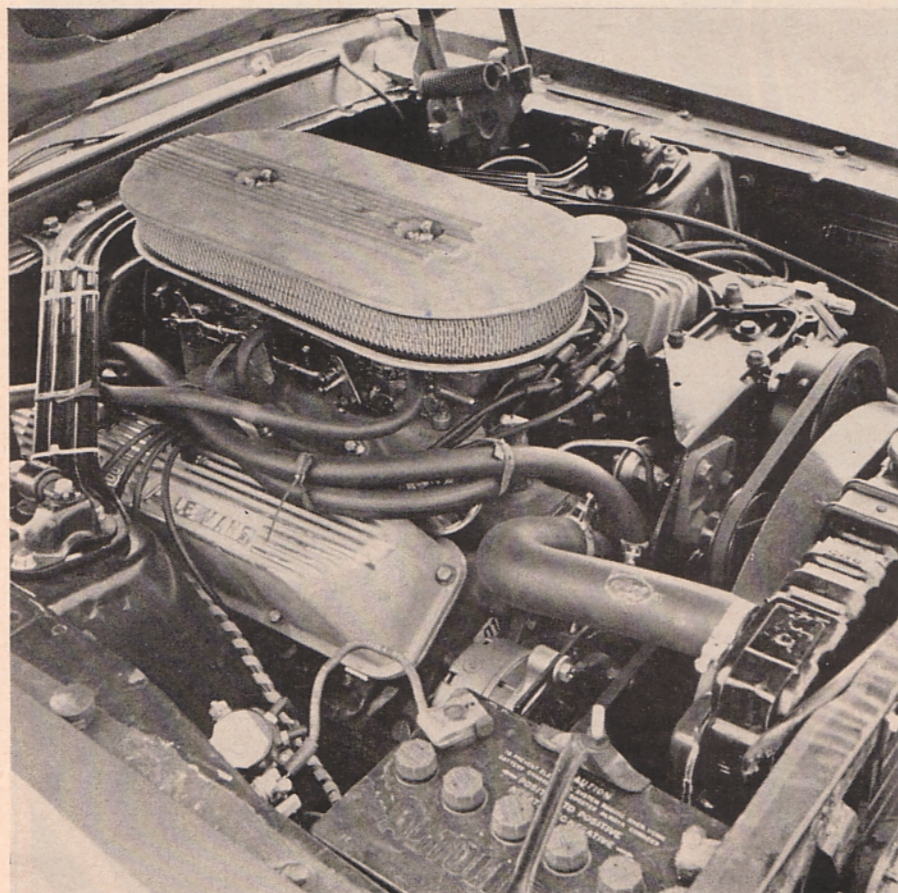

truck . . . and we loved it. It was a man's car in a world of increasingly effeminate ladies' carriages. You drove it brutally and it reacted brutally. Every minute at speed was like the chariot-racing scene in "Ben Hur."

Unfortunately for Shelby, the market for a car as hairy as this was limited. One state's motor vehicle bureau complained that the brakes, although virtually fade-proof, required too much pedal pressure. Apparently, the inspectors' leg muscles had atrophied from years of dainty stabs at over-boosted power brakes.



For 1966, Shelby toned the GT 350 down from a wild mustang to a merely high-strung thoroughbred. It was barely tame enough for the Hertz Corporation, which bought 1000 of them and put them into service as the hottest rent-a-cars the business has ever seen.

The GT 350 still wasn't acceptable to a large enough body of potential buyers, so, in 1967, an abrupt change in policy has transformed the Shelby Mustang. The \$1000-or-so above the price of a comparable Mustang that used to go into expensive, unseen mechanical improvements is now lavished instead on exterior styling changes. The back lot at Shelby American's remanufacturing plant is littered with stock Mustang front and rear sheet metal, and engine and trunk lids. In their stead go fiberglass panels stylized by Ford's Chuck McHose, working in close co-operation with Shelby American.

The new nose piece arches tautly forward, forming a deep cowl for the headlights (changed from duals to quads, with the high-beams centered in the grille, driving-lamp style). The hood features an air-scoop even larger than last year's, now divided by an air-splitter, and it's still functional. At the rear, the new trunk lid and tail piece combine to form a racy-looking aerodynamic spoiler lip. No one would say for sure if high-speed tests had proved the efficiency of this styling gimmick or not—but it looks right. Finally, the

(Text continued on page 65; Specifications overleaf)

The Shelby Mustang conversion includes a new nose and a big, fat, Kamm-type rear deck treatment. The GT 500 isn't quite as fast as we expected, but it does with ease what the old 350 took brute force to accomplish.

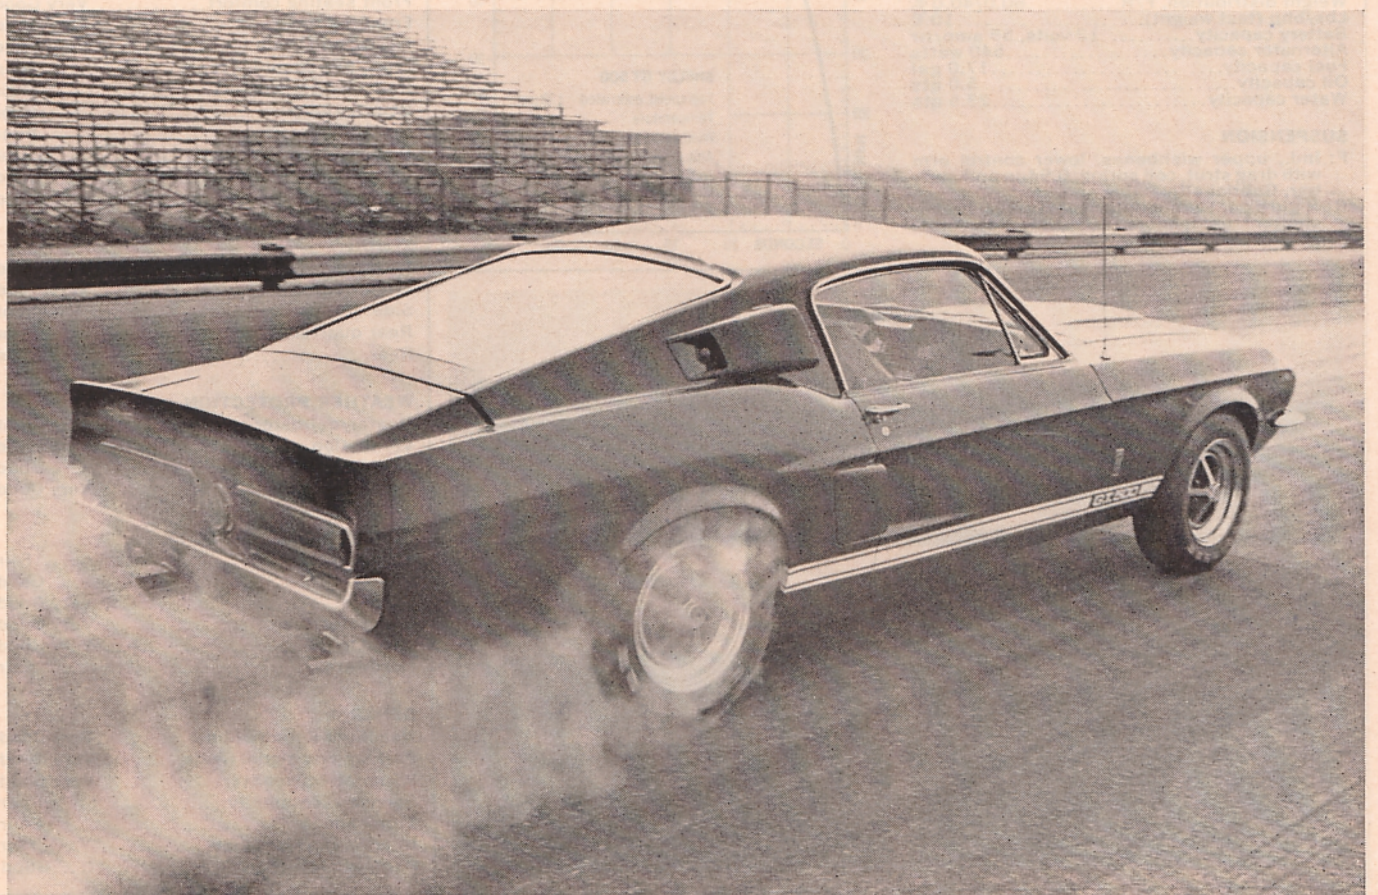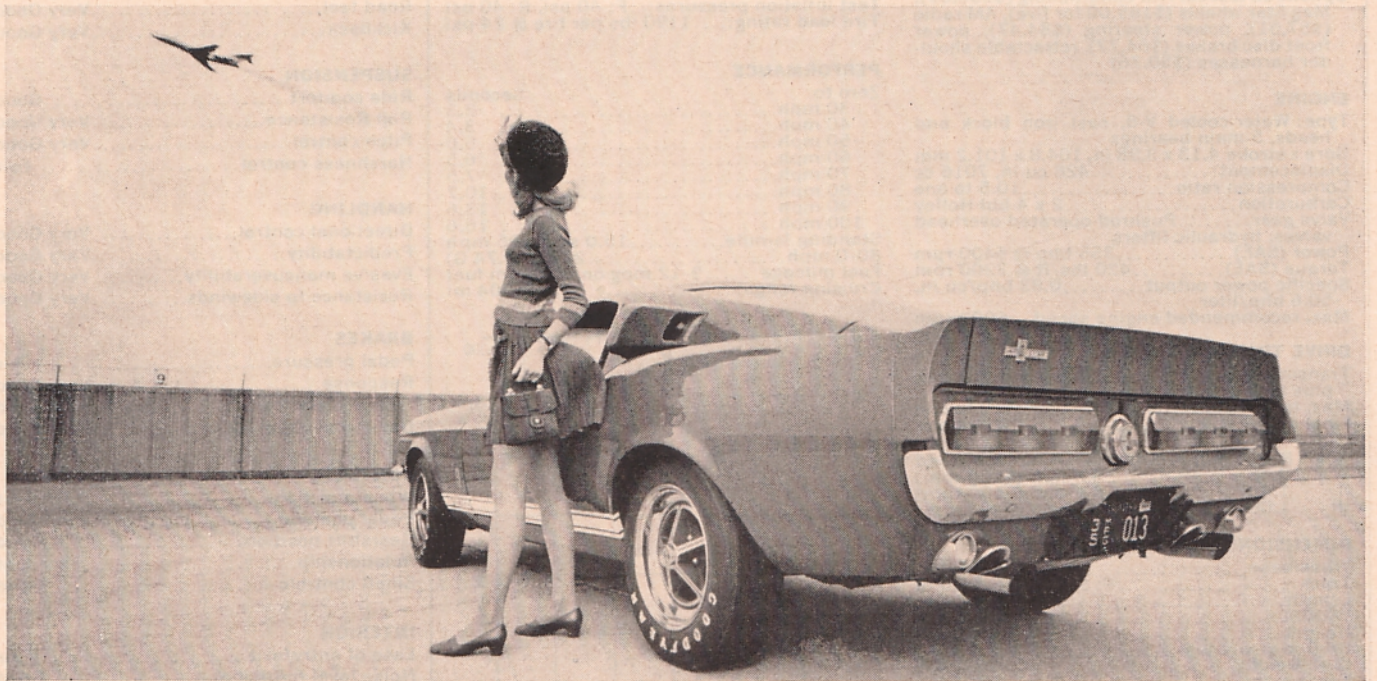

ShelbyResearchGroup.com

## SHELBY GT 500

**Manufacturer:** Shelby American, Inc.  
6501 West Imperial Hwy.  
Los Angeles, California

**Number of dealers in U.S.:** 90

**Vehicle type:** Front-engine, rear-wheel-drive, 2+2-passenger GT/sports sedan, all-steel integral body/chassis, fiberglass front and rear panels

**Price as tested:** \$5043.60

(Manufacturer's suggested retail price, plus Federal excise tax, dealer preparation and delivery charges; does not include state and local taxes, license or freight charges)

**Options on test car:** Air conditioning (\$356.09), Mag Star wheels (\$185.00 for five), AM radio (\$57.51), power steering (\$84.47), power front disc brakes (\$64.77), retractable shoulder harnesses (\$50.76)

### ENGINE

Type: Water-cooled V-8, cast iron block and heads, 5 main bearings  
Bore x stroke 4.13 x 3.98 in, 104.8 x 101.2 mm  
Displacement..... 428 cu in, 7016 cc  
Compression ratio..... 10.5 to one  
Carburetion..... 2 x 4-bbl Holley  
Valve gear..... Pushrod-operated overhead valves, hydraulic lifters  
Power (SAE)..... 355 bhp @ 5400 rpm  
Torque (SAE)..... 420 lbs/ft @ 3200 rpm  
Specific power output..... 0.83 bhp/cu in, 50.6 bhp/liter  
Max. recommended engine speed... 6000 rpm

### DRIVE TRAIN

Transmission..... 3-speed automatic, plus torque converter  
Max. torque converter ratio..... 2.10 to one  
Final drive ratio..... 3.25 to one

Gear	Ratio	Mph/1000 rpm	Max. test speed
I	2.46	9.6	49 mph (5100 rpm)
II	1.46	16.2	83 mph (5100 rpm)
III	1.00	23.6	128 mph (5400 rpm)

### DIMENSIONS AND CAPACITIES

Wheelbase..... 108.0 in  
Track..... F: 58.0 in. R: 58.0 in  
Length..... 186.6 in  
Width..... 70.9 in  
Height..... 51.6 in  
Ground clearance..... 4.3 in  
Curb weight..... 3370 lbs  
Test weight..... 3825 lbs  
Weight distribution, F/R..... 60.0/40.0 %  
Lbs/bhp (test weight)..... 10.8  
Battery capacity..... 12 volts, 55 amp/hr  
Alternator capacity..... 540 watts  
Fuel capacity..... 17.0 gal  
Oil capacity..... 5.0 qts  
Water capacity..... 23.5 qts

### SUSPENSION

F: Ind., upper wishbones, lower control arm with drag strut, coil spring, 0.94-in anti-sway bar, Gabriel adjustable shocks  
R: Rigid axle, semi-elliptic leaf springs, rubber chatter dampeners, Gabriel adjustable shocks

### STEERING

Type..... Power-assisted recirculating ball  
Turns lock-to-lock..... 4.0  
Turning circle..... 37 ft

### BRAKES


F: Kelsey-Hayes 11.3-in vented discs  
R: 10.0 x 2.5-in cast iron drums  
Swept area..... 376.0 sq in

### WHEELS AND TIRES

Wheel size and type..... 7.0 x 15-in, Kelsey-Hayes "Mag Star," aluminum spider with steel rims, 5-bolt  
Tire make, size and type..... Goodyear E70-15  
Speedway, 4-ply nylon tubeless  
Test inflation pressures: F: 40 psi, R: 40 psi  
Tire load rating:..... 1190 lbs per tire @ 24 psi

### PERFORMANCE

Zero to	Seconds
30 mph	2.3
40 mph	3.4
50 mph	5.0
60 mph	6.5
70 mph	7.5
80 mph	10.7
90 mph	13.6
100 mph	16.6
Standing 1/4-mile	15.0 sec @ 95 mph
80-0 mph	2.87 ft (0.74 G)
Fuel mileage	9-12 mpg on premium fuel
Cruising range	153-204 mi

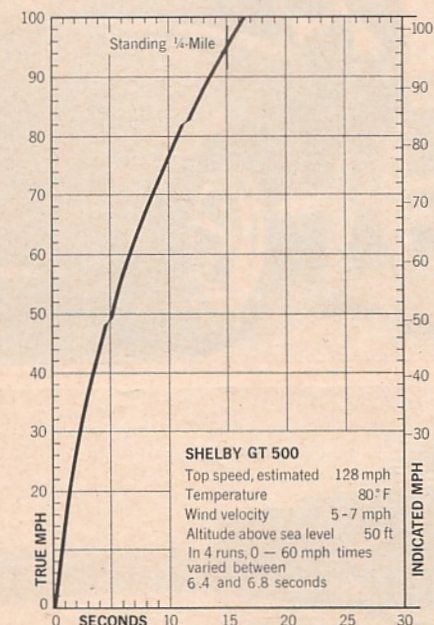

## CHECK LIST

### ENGINE

Starting..... Very Good  
Response..... Excellent  
Vibration..... Very Good  
Noise..... Good

### DRIVE TRAIN

Shift linkage..... Very Good  
Shift smoothness..... Fair  
Drive train noise..... Good

### STEERING

Effort..... Excellent  
Response..... Very Good  
Road feel..... Very Good  
Kickback..... Very Good

### SUSPENSION

Ride comfort..... Good  
Roll Resistance..... Very Good  
Pitch control..... Very Good  
Harshness control..... Fair

### HANDLING

Directional control..... Very Good  
Predictability..... Very Good  
Evasive maneuverability..... Very Good  
Resistance to sidewinds..... Very Good

### BRAKES

Pedal pressure..... Fair  
Response..... Very Good  
Fade resistance..... Good  
Directional stability..... Very Good

### CONTROLS

Wheel position..... Excellent  
Pedal position..... Very Good  
Gearshift position..... Good  
Relationship..... Excellent  
Small controls..... Good

### INTERIOR

Ease of entry/exit..... Fair  
Noise level (cruising)..... Good  
Front seating comfort..... Very Good  
Front leg room..... Very Good  
Front head room..... Very Good  
Front hip/shoulder room..... Good  
Rear seating comfort..... Fair  
Rear leg room..... Poor  
Rear head room..... Poor  
Rear hip/shoulder room..... Fair  
Instrument comprehensiveness..... Very Good  
Instrument legibility..... Good

### VISION

Forward..... Very Good  
Front quarter..... Very Good  
Side..... Excellent  
Rear quarter..... Poor  
Rear..... Good

### WEATHER PROTECTION



Heater/defroster..... Excellent  
Ventilation..... Very Good  
Air conditioner..... Good  
Weather sealing..... Very Good

### CONSTRUCTION QUALITY

Sheet metal..... Fair  
Paint..... Good  
Chrome..... Very Good  
Upholstery..... Very Good  
Padding..... Very Good  
Hardware..... Fair

### GENERAL

Headlight illumination..... Very Good  
Parking and signal lights..... Very Good  
Wiper effectiveness..... Very Good  
Service accessibility..... Poor  
Trunk space..... Poor  
Interior storage space..... Fair  
Bumper protection..... Good

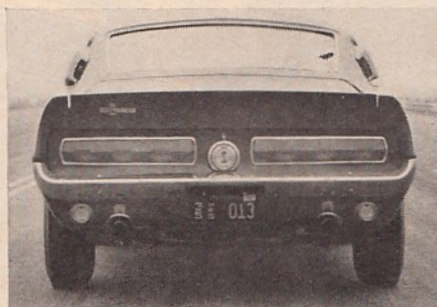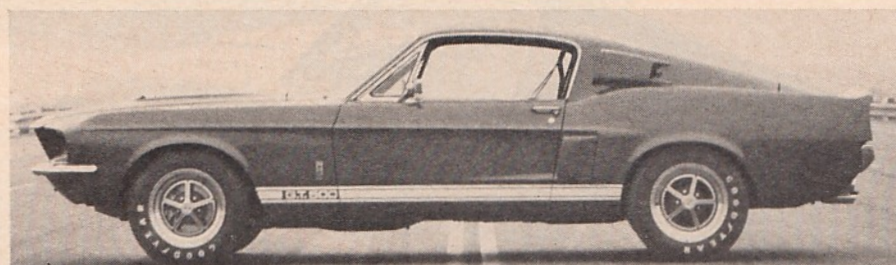

*(continued from page 28)*

side louvres have been replaced by scoops—big hairy scoops that poke out into the airstream beyond the boundary layer. Actually, these are to let the air out; stale interior air exits through the inconspicuous slot behind the scoop. The forward facing scoop leads to a narrow venturi area that helps draw air out the rear slot. That light behind the scoop flashes when the turn signals are on and glows steadily when the brakes are on. Another pair of funnel scoops are installed at the rear of the sculptured side panel—this time to blow air at the rear brake drums. A pair of giant taillights running almost the full width of the Kamm-inspired tail completes the Shelby look. As a whole, the Shelby Mustangs make the regular Mustangs look sick.

Underneath, the Koni shock absorbers have given way to less expensive adjustable Gabriels; the traction bars are gone; the noisy racing differential has long since disappeared; and the Shelby Mustang has become a lot less like a NASCAR stocker without becoming any less roadable. The engineering is now built into stock parts instead of having to be included in extra hardware. The front suspension geometry was determined by Klaus Arning and the same computer he used in setting up the suspension of the Ford GT 40 and Shelby's Cobra II, and the front anti-sway bar has been reduced from an almost-immovable one inch to a more compliant .94 in. The rear leaf springs are now equipped with little rubber bumpers called "hopper stoppers" that are designed to prevent axle hop under hard acceleration. Most of the competition-bred racing equipment is still available—if necessary—as options. Oddly, the rear springs are stiffer this year (135 lbs./in. vs. 115 lbs./in. in '66), but the actual ride is smoother. The front springs of the GT 500, at 365 lbs./in., are naturally stronger than those of the GT 350, at 330 lbs./in.

We drove, briefly, a '67 GT 350, and noted how busy and mechanical the engine sounds. Jumping from that into the GT 500, the most marked difference was in engine noise, which is practically non-existent in the 428-engined car except for a motorboating exhaust throb. Our test car also had an automatic transmission (it will be difficult to get a GT 500 with a 4-speed manual), power brakes, fast-ratio power steering, air conditioner, shoulder harnesses and roll bar. (More about

these last two items later.) All the viciousness had gone out of the car, without any lessening of its animal vitality. It still reacts positively, but to a much lighter touch. The power brakes, we felt, were a little oversensitive, but the automatic transmission was near-perfect. The GT 500 accelerates powerfully at any legal speed, gets off the mark with little wheelspin despite the absence of a limited-slip, and shifts very crisply. The automatic is a beefed-up Ford C-6, and each gear change feels like "a shift and a half," in the words of one staffer. The power steering is among the best we've driven, partially because it's quick, but mostly because we could actually feel the road through the wood-rim wheel (standard equipment).

In softening the car to make it more acceptable to a wider market, some of the sheer handling virtuosity of the old GT 350s has been lost, but not much. As you might expect, the car understeers until you get the throttle open. It tracks well in a corner, and is exceptionally agile in evasive maneuverability tests for a 3500-lb. car. Our handling tests were made with 40 psi in the Goodyear Speedway E70-15 tires (similar to Firestone's Wide Ovals), so the harshness control was not all it would be with normal pressures (28 psi front and 24 psi rear).

The acceleration was not all it might have been either. With less than 100 miles on the odometer, the engine was tight and breathless at anything much over 5000 rpm. The redline is 6000, but we got the best acceleration times letting the automatic shift by itself at 5100 rpm.

The .74 G braking ability might have been better if the power brakes were more controllable. Wheel lock-up was hard to avoid, and harder to correct—pedal pressure has to drop to near-zero before the locked wheel begins rolling again. This is a trait common to Ford power brake systems, and a better compromise between the touchy Dearborn system and the old GT 350 leg-buster could be worked out.

We're sure someone will utter a cry of protest, but to our knowledge, the '67 Shelby Mustang is the first production car to offer a true roll-over bar as standard equipment. Not a thicker roof section, but a real live roll bar. The shoulder harness is not standard equipment, but like the GT 500's automatic transmission, it will be difficult to get a Shelby Mustang out of the showroom without one.

The roll bar itself is a tubular

structure, covered with padding, and welded to the chassis. Where it curves up into the roof, tabs poke out, and bolts secure the bar to the car's top in the threaded holes intended for the upper attachment point for Ford's over-the-shoulder shoulder harness. Shelby's shoulder harness is the double type. Another pair of tabs are welded to the roll bar, and to these are bolted a pair of inertia reels made by Advanced Safety Devices. The reels exert a half-pound pull, thus requiring no adjustment by the user, and lock at .5 G, something like a windowshade mechanism in reverse. The shoulder harness strap divides just behind the user's neck, the halves passing over his shoulders to fasten at points on either side of the seat. A standard lap belt is used in conjunction with the shoulder harness, but because the halves *don't* come together at the lap buckle, like racing harnesses, it's the only shoulder harness we've seen that women can wear. These devices have to be seen and felt in action to be believed. At the risk of encouraging showroom traffic by curiosity seekers, we'd recommend that our readers stop by Shelby American dealers and try the shoulder harnesses. Then, no matter what other car you may buy, drop a line to the manufacturer and suggest that he offer shoulder harnesses like this on his cars.

The rest of the GT 500 interior is stock Mustang, except for a few points. An oil cooler is standard equipment, but had been removed for some obscure evaluation on our test car, and an oil temperature gauge had been mounted under the dash. It never got over 230° F, incidentally. Our car also had the optional folding rear seat and an instrument cluster (ammeter and oil pressure gauge—the pressure was a steady 60 psi). The presence of the shoulder harnesses greatly complicated entry to the rear seat, what with climbing through a mass of nylon straps and ducking the inertia reels.

The air conditioner controls were confusing in an otherwise well laid-out interior, but this small annoyance was more than made up for by Shelby's special wood-rim steering wheel. It has much less dish than Ford's, thus placing it in a perfect position for effortless control.

That, then, is the GT 500. A grown-up sports car for smooth touring. No more wham-bam, thank-you-ma'am, just a purring, well-controlled tiger. Like Shelby says, "This is the first car I'm really proud of." Right. We've come a long way since bib overalls too, Shel. **cjd**